

# CARINTHIA

## 2-WAY THERMOSTATIC TRIM

TM.CX.220

### Description

- **TM.CX.220** - Trim for 2-way thermostatic valve
- 3 positions

### Flow Rate

- 6.1 gpm | 23 lpm | 60 psi

### Cartridge


- CE.1401.TT - cartridge
- CE.1710.DR - diverter

### Available Handles



Round ( 1 )   Octagonal ( 2 )   Cross ( 3 )

\*Available Handle selection only for diverter and volume control handle

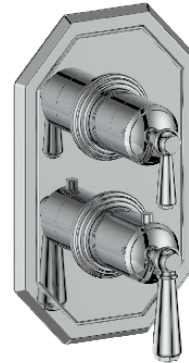

### Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Polished Nickel (PN)
- Brushed Gold (BG)
- Chrome/Matte Black (CB)
- Brushed Nickel/Matte Black (BB)
- Polished Nickel/Matte Black (PB)
- Brushed Gold/Matte Black (BGB)

(Model Pictured: Chrome)

### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

### Warranty

- Limited lifetime warranty  
(see full warranty for details)

