

ANTAU 3-WAY THERMOSTATIC SHOWER TRIM

TM.AU.320.310.

Components Included

- TM.AU.320.CC Trim for 3-way thermostatic valve
- SH.04.0812.CC 8" x 12" rectangular stainles steel shower head
- WA.01.16.CC 16" wall mount shower arm with 1/2" female NPT connection
- BH.04.03.CC 27½" sliding shower bar with hose and 4-function hand shower (HS.04.03.CC)
- EC.01.01.CC Square brass elbow connector with ½" female NPT connection
- TS.04.07.CC 7½" brass tub spout with ½" female NPT connection

Available Finishes

■ Chrome

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Valve & cartridge Limited lifetime warranty
- Components Limited lifetime warranty (see full warranty for details)





ANTAU 3-WAY THERMOSTATIC VALVE & TRIM

TM.AU.320.CC

Description

- TM.AU.320.CC Trim for 3-way thermostatic valve
- 5 positions

Flow Rate

■ 6.2 gpm | 23.4 lpm | 60 psi

Cartridge

- CE.1401.TT cartridge
- CE.1408.DR diverter

Available Finishes


■ Chrome (CC)


Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty









16" WALL ARM

WA.01.16

Description

- 16" wall mount shower arm with ½" female NPT connection
- Square pipe with rectangular escutcheon plate

Available Finishes


- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)


(Model Pictured: Chrome)


Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

Warranty

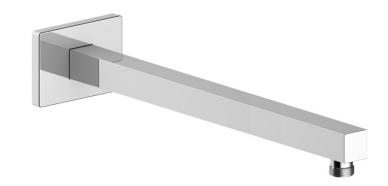

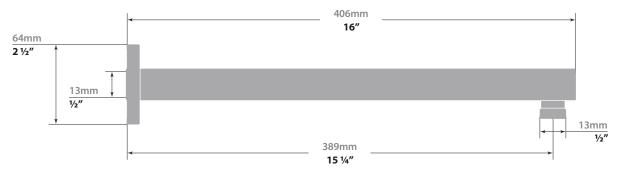





8" x 12" RECTANGULAR SHOWER HEAD

SH.04.0812.CC

Description

- 8" x 12 " rectangular stainless steel shower head
- Anti-limescale technology

Flow Rate

■ 2 gpm | 7.6 lpm | 60 psi


Available Finishes


■ Chrome (CC)


Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

Warranty





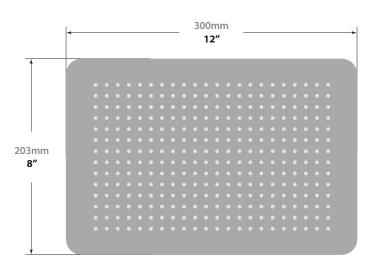



ANTAU

SLIDING SHOWER BAR WITH HANDHOWER

BH.04.03.CC

Description

- **SB.04.27** 27½" sliding shower bar
- **HE.150** 59" hose
- HS.04.03 4-function hand shower

Flow Rate

■ 2 gpm | 7.6 lpm | 60 psi

Available Finishes


■ Chrome (CC)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty



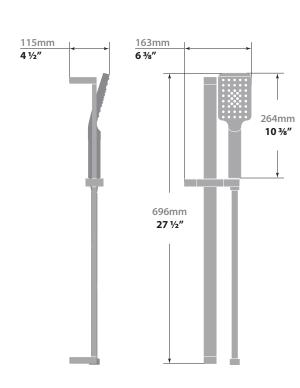



SQUARE WALL SUPPLY ELBOW

EC.01.01

Description

■ Square brass elbow connector with ½" female NPT connection

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)


(Model Pictured: Chrome)


Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

Warranty









ANTAU TUB SPOUT

TS.04.07.CC

Description

■ Brass tub spout with ½" female NPT connection

Available Finishes

■ Chrome (CC)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty



