CARINTHIA
3/4" HIGH FLOW THERMOSTATIC VALVE

VT.CX.150

Description

- **VE.150** - ¾" High flow thermostatic valve
- **TM.CX.150** - Trim for 3/4" high flow valve

Flow Rate

- 12 gpm | 45 lpm | 60 psi

Cartridge

- CE.2300.TT - Thermostatic cartridge

control handle

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Polished Nickel (PN)
- Brushed Gold (BG)
- Chrome/Matte Black (CB)
- Brushed Nickel/Matte Black (BB)
- Polished Nickel/Matte Black (PB)
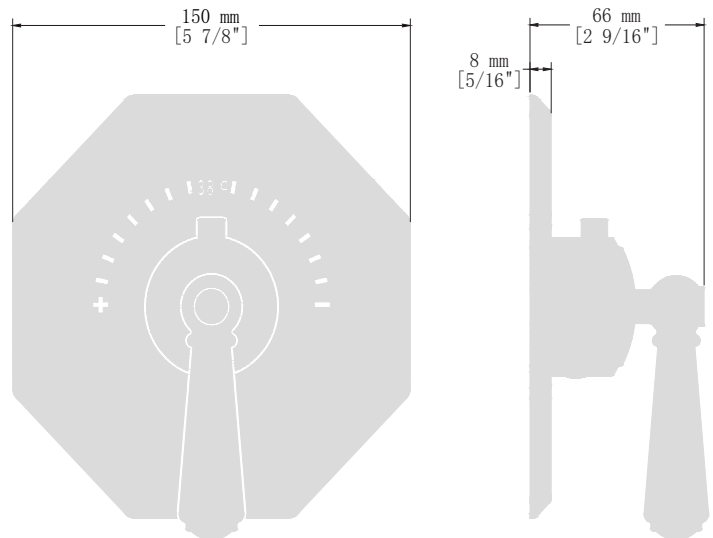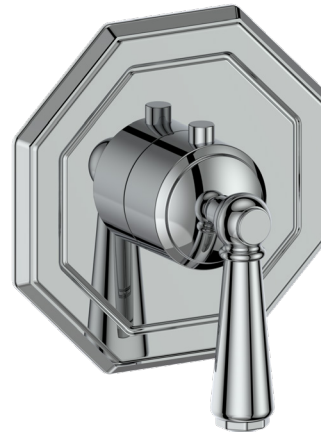- Brushed Gold/Matte Black (BGB)

(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

Warranty

- Limited lifetime warranty
  (see full warranty for details)

150 mm
[5 7/8"]

66 mm
[2 9/16"]

8 mm
[5/16"]

3/4" HIGH-FLOW THERMOSTATIC VALVE WITH 3 VOLUME CONTROL

VE.350

Description

■ 3/4" high flow valve with thermostatic cartridge and 3 seperate volumne control
■ ¾" female NPT intlet connections

Flow Rate

■ 12 gpm | 45 lpm | 60 psi

Cartridge

■ CE.2300.TT - thermostatic cartridge
■ CE.1700.R - volume control cartridge

Warranty

■ Limited lifetime warranty (see full warranty for details)

Codes / Standards

■ Uniform Plumbing Code (UPC®)
■ ASME A112.18.1/CSA B125.1

Vogt Industries reserves the right to change the product material and specifications without notice. Actual product may differ from pictures.
For further enquiries or assistance please contact customercare@vogtindustries.com.

vogtindustries.com