

NIVEAU 3-WAY THERMOSTATIC SHOWER SYSTEM

SET.NU.320.710

Description

- VE.320 Thermostatic valve with integrated 3-way diverter
- TM.NU.320 Trim for 3-way thermostatic valve
- SH.07.0808 8" square full brass shower head
- WA.01.16 16" wall mount shower arm with ½" female NPT connection
- BH.07.03 30¹/₈" sliding shower bar with hose and 4 function hand shower (HS.04.03)
- EC.07.01 Square brass elbow connector with 1/2" female NPT connection
- BJ.01.01 Built-in body jet with ½" female NPT connection (x2)

Available Finishes

- Chrome (CC)
- Matte Black (MB)

(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Valve & cartridge Limited lifetime warranty
- Components Limited lifetime warranty (see full warranty for details)

Please note that this shower kit is also available with a 4" ceiling arm (CA.03.04) & 8" ceiling arm (CA.03.08)

4" ceiling arm Configuration - SET.NU.320.714 8" ceiling arm Configuration - SET.NU.320.718











NIVEAU 3-WAY THERMOSTATIC VALVE & TRIM

VT.NU.320

Description

- VE.320 ½" thermostatic valve with 3-way diverter
- TM.NU.320 Trim for 3-way thermostatic valve
- 5 positions

Flow Rate

■ 6.2 gpm | 23.4 lpm | 60 psi

Cartridge

- CE.1401.TT cartridge
- CE.1408.DR diverter

Available Finishes

- Chrome (CC)
- Matte Black (MB)

(Model Pictured: Chrome)


Codes / Standards


- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty


 Limited lifetime warranty (see full warranty for details)



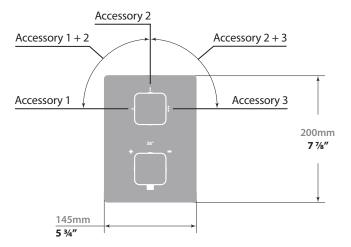



VE.320 - 3-Way Thermostatic Valve

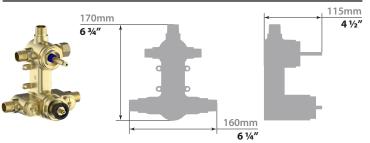

Vogt Industries reserves the right to change the product material and specifictions without notice. Actual product may differ from pictures. For further enquiries or assistance please contact service@vogtindustries.com.

vogt SPEC SHEET

3-WAY THERMOSTATIC VALVE

VE.320

Description

- Valve with thermostatic cartridge and 3-way diverter
- ½" male NPT connections

Flow Rate

■ 6.2 gpm | 23.4 lpm | 60 psi


Cartridge

- CE.1401.TT cartridge
- CE.1408.DR diverter


Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty









16" WALL ARM

WA.01.16

Description

- 16" wall mount shower arm with ½" female NPT connection
- Square pipe with rectangular escutcheon plate

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)


(Model Pictured: Chrome)


Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1


Warranty

 Limited lifetime warranty (see full warranty for details)

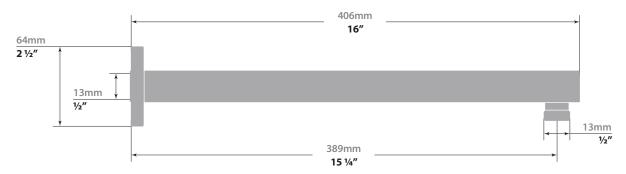



Vogt Industries reserves the right to change the product material and specificitions without notice. Actual product may differ from pictures. For further enquiries or assistance please contact service@vogtindustries.com.

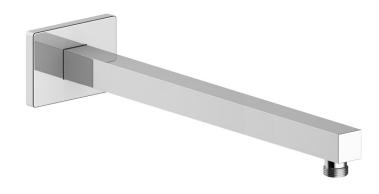



8" SQUARE SHOWER HEAD

SH.07.0808

Description

- 8" square full brass shower head
- Anti-limescale technology

Flow Rate

■ 2 gpm | 7.6 lpm | 60 psi

Available Finishes


- Chrome (CC)
- Matte Black (MB)


(Model Pictured: Chrome)


Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1

Warranty









NIVEAU SLIDING SHOWER BAR WITH HANDSHOWER

BH.07.03

Description

- SB.07.30 30¹/₈" sliding shower bar
- HE.150 59" hose
- HS.04.03 4-function hand shower

Flow Rate

■ 2 gpm | 7.6 lpm | 60 psi

Available Finishes

- Chrome (CC)
- Matte Black (MB)
- (Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty



vogt SPEC SHEET

SQUARE WALL SUPPLY ELBOW

EC.07.01

Description

Square brass elbow connector with ¹/₂" female NPT connection

Available Finishes

- Chrome (CC)
- Matte Black (MB)


(Model Pictured: Chrome)


Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1

Warranty









SQUARE IN-WALL JET

BJ.01.01

Description

Built-in body jet with ½" female NPT connection

Flow Rate

■ 2.6 gpm | 10 lpm | 60 psi

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)

(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1

Warranty

