

# NIVEAU

## 3/4" THERMOSTATIC SHOWER SYSTEM

SET.NU.141.810

### Description

- **VE.140** - 3/4" thermostatic valve without diverter
- **TM.NU.140** - Trim for 3/4" thermostatic valve
- **VE.DR.30** - 3/4" 3-way diverter with shut-off
- **TM.NU.30** - Trim for 3-way diverter
- **SH.07.0808** - 8" square full brass shower head
- **WA.01.16** - 16" wall mount shower arm with 1/2" female NPT connection
- **BH.07.03** - 30 1/8" sliding shower bar with hose and 4 function hand shower (HS.04.03)
- **EC.07.01** - Square brass elbow connector with 1/2" female NPT connection
- **EJ.01.01** - Exposed body jet with 1/2" female NPT connection (x4)

### Available Finishes

- Chrome (CC)
- Matte Black (MB)

(Model Pictured: Chrome)

### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

### Warranty

- Valve & cartridge - Limited lifetime warranty
- Components - Limited lifetime warranty  
(see full warranty for details)

Please note that this shower kit is also available with a 4" ceiling arm (**CA.03.04**) & 8" ceiling arm (**CA.03.08**)

4" ceiling arm Configuration - **SET.NU.141.814**

8" ceiling arm Configuration - **SET.NU.141.818**



## NIVEAU

### ¾" THERMOSTATIC VALVE & TRIM WITHOUT DIVERTER

VT.NU.140

#### Description

- **VE.140** - ¾" valve with thermostatic cartridge
- **TM.NU.140** - Trim for ¾" thermostatic valve
- Volume control or diverter with shut-off is required

#### Flow Rate

- 7.2 gpm / 27.4 lpm / 60 psi

#### Cartridge

- CE.1401.TT - cartridge

#### Available Finishes

- Chrome (CC)
- Matte Black (MB)


(Model Pictured: Chrome)

#### Codes / Standards



- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

#### Warranty

- Limited lifetime warranty  
(see full warranty for details)

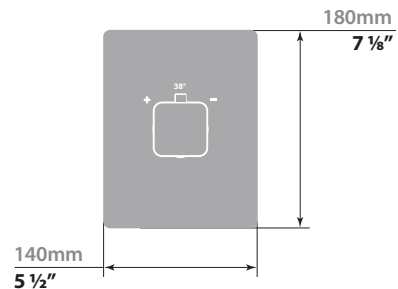

#### VE.140 - ¾" Thermostatic Valve

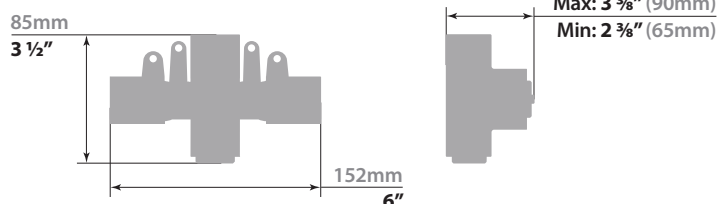

### 3/4" THERMOSTATIC VALVE

VE.140

#### Description

- Valve with thermostatic cartridge
- 3/4" female NPT connections
- 1/2" male NPT adaptors included
- Volume control or diverter with shut-off is required

#### Flow Rate

- 7.2 gpm / 27.4 lpm / 60 psi

#### Cartridge




- CE.1401.TT cartridge

#### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

#### Warranty

- Limited lifetime warranty  
(see full warranty for more details)

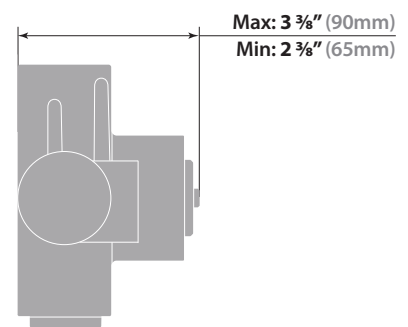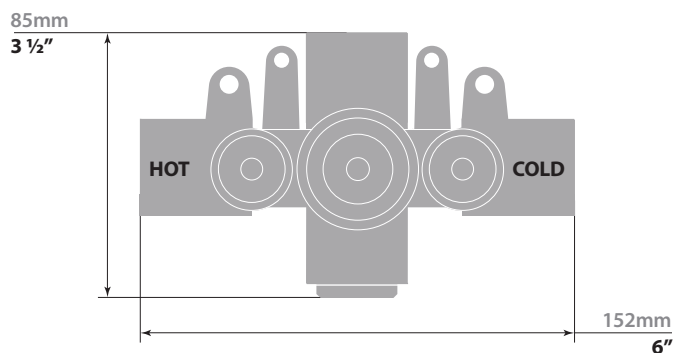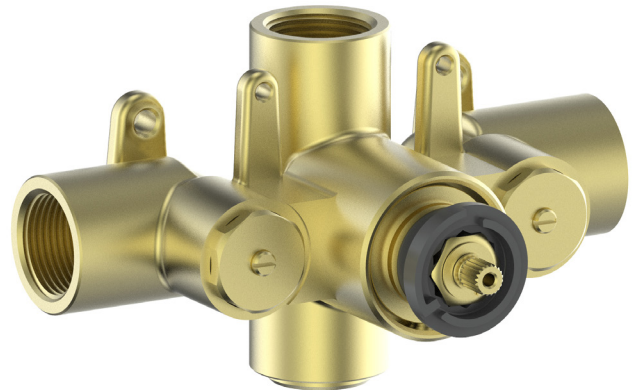

### 3/4" 3-WAY DIVERTER

VE.DR.30

#### Description

- 3-way diverter with cartridge
- 3/4" female NPT connections
- 1/2" male NPT adaptors included
- 5 positions

#### Cartridge






- CE.1408.DR - diverter

#### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

#### Warranty

- Limited lifetime warranty  
(see full warranty for more details)

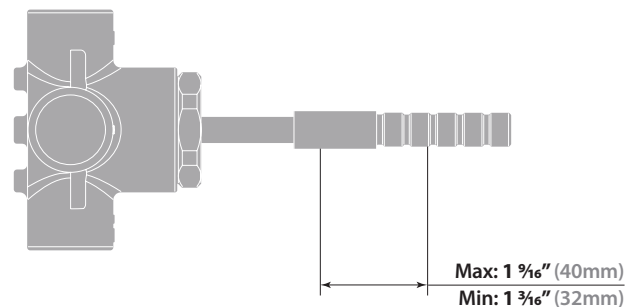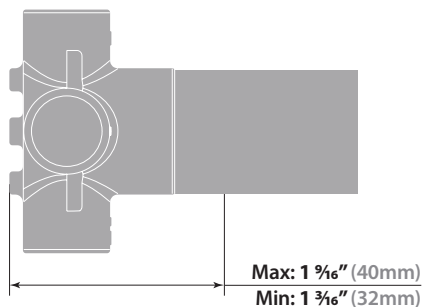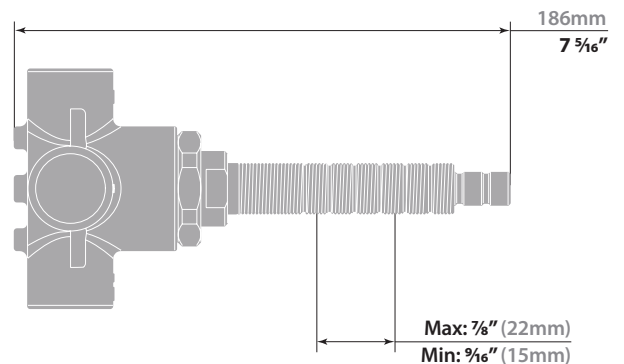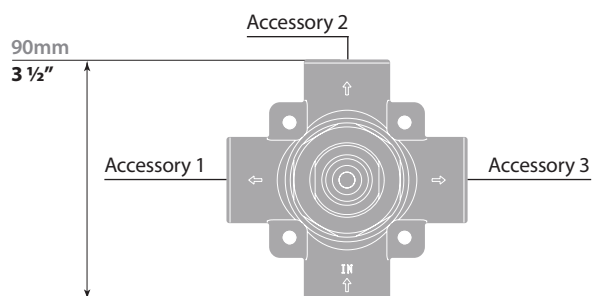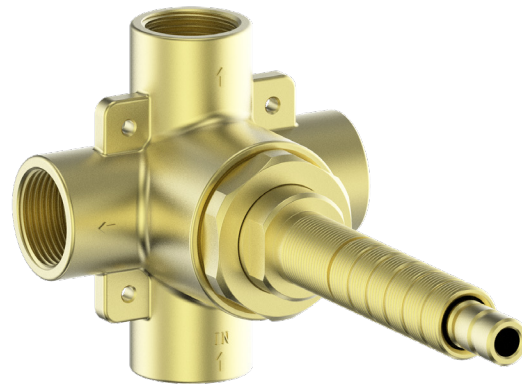

## NIVEAU

### ¾" 3-WAY DIVERTER WITH SHUT-OFF & TRIM

DR.NU.30

#### Description

- **VE.DR.30** - ¾" 3-way diverter with cartridge
- **TM.NU.30** - Trim for 3-way diverter
- 5 positions

#### Cartridge

- CE.1408.DR - diverter

#### Available Finishes

- Chrome (CC)
- Matte Black (MB)


(Model Pictured: Chrome)

#### Codes / Standards




- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

#### Warranty

- Limited lifetime warranty  
(see full warranty for details)

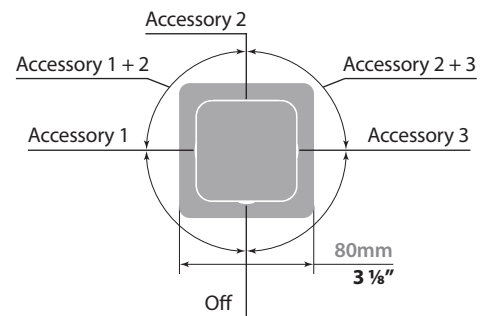

#### VE.DR.30 - ¾" 3-Way Diverter with Shut-Off

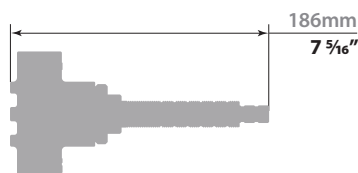

### 16" WALL ARM

WA.01.16

#### Description

- 16" wall mount shower arm with 1/2" female NPT connection
- Square pipe with rectangular escutcheon plate

#### Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)




(Model Pictured: Chrome)

#### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

#### Warranty

- Limited lifetime warranty (see full warranty for details)

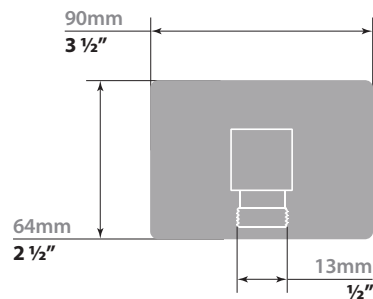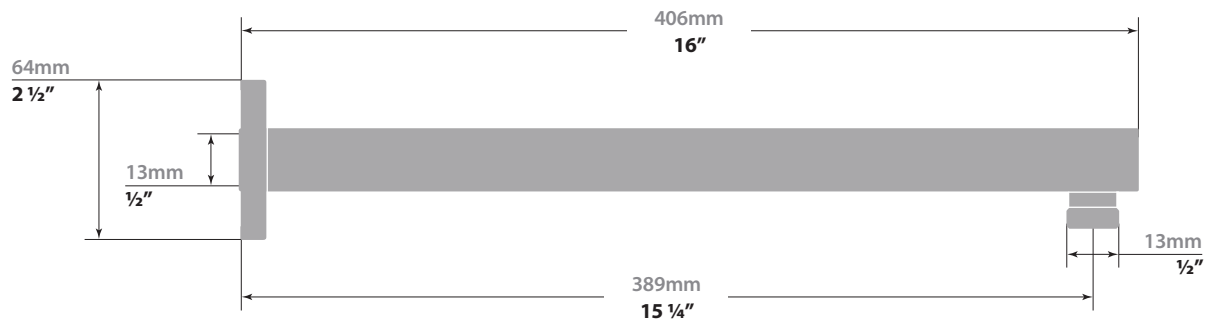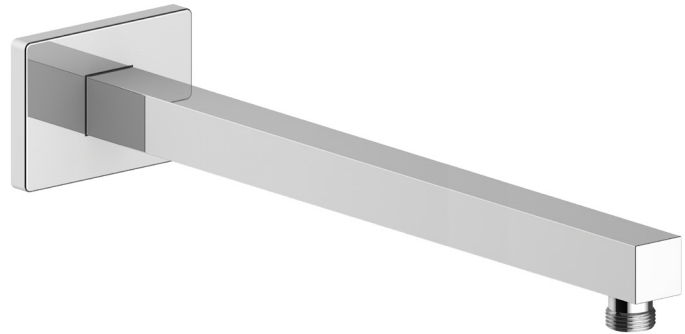

### 8" SQUARE SHOWER HEAD

SH.07.0808

#### Description

- 8" square full brass shower head
- Anti-limescale technology

#### Flow Rate

- 2 gpm | 7.6 lpm | 60 psi

#### Available Finishes

- Chrome (CC)
- Matte Black (MB)




(Model Pictured: Chrome)

#### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

#### Warranty

- Limited lifetime warranty  
(see full warranty for details)

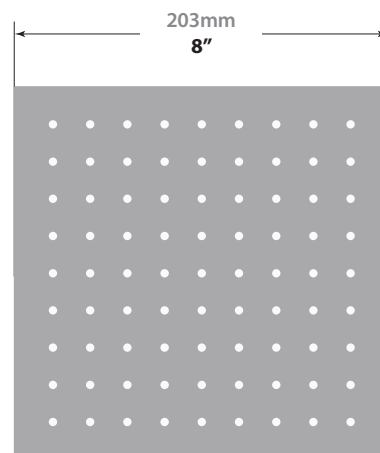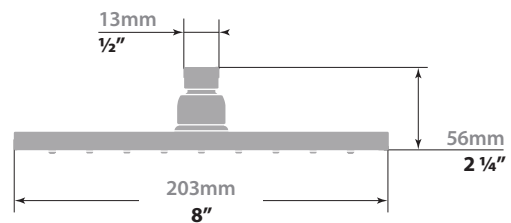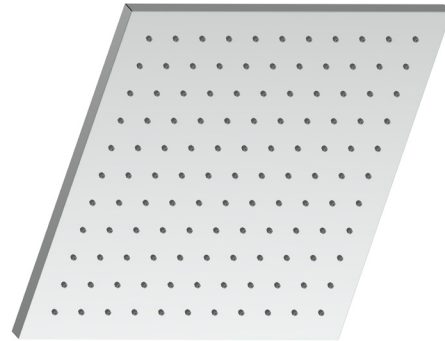

# NIVEAU

## SLIDING SHOWER BAR WITH HANDSHOWER

BH.07.03

### Description

- **SB.07.30** - 30 1/8" sliding shower bar
- **HE.150** - 59" hose
- **HS.04.03** - 4-function hand shower

### Flow Rate

- 2 gpm | 7.6 lpm | 60 psi

### Available Finishes

- Chrome (CC)
- Matte Black (MB)


(Model Pictured: Chrome)

### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

### Warranty

- Limited lifetime warranty  
(see full warranty for details)

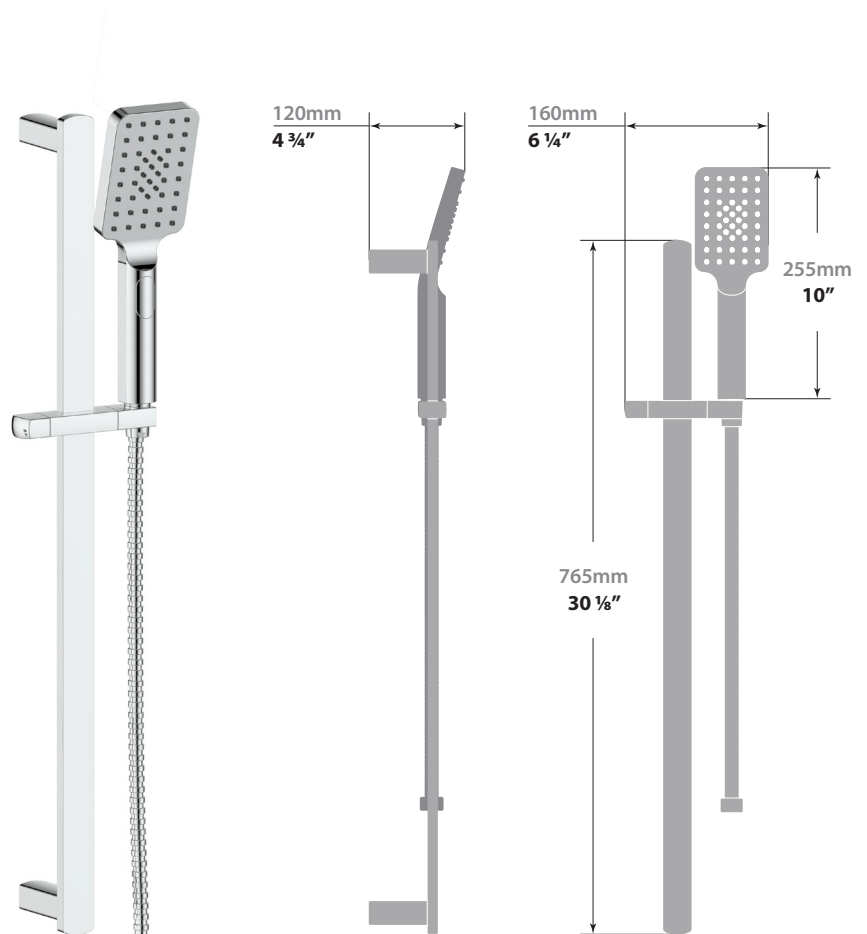



## SQUARE WALL SUPPLY ELBOW

EC.07.01

### Description

- Square brass elbow connector with ½" female NPT connection

### Available Finishes

- Chrome (CC)
- Matte Black (MB)



(Model Pictured: Chrome)

### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

### Warranty

- Limited lifetime warranty  
(see full warranty for details)

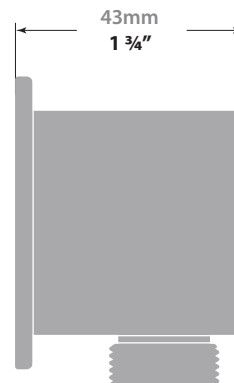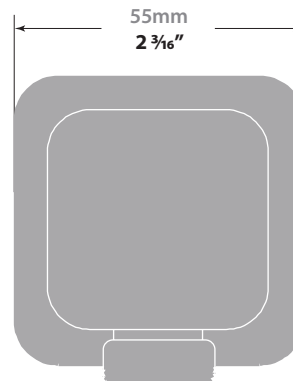

### SQUARE EXPOSED JET

EJ.01.01

#### Description

- Exposed body jet with ½" female NPT connection

#### Flow Rate

- 1.9 gpm | 7.4 lpm | 60 psi

#### Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)

(Model Pictured: Chrome)

#### Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

#### Warranty

- Limited lifetime warranty  
(see full warranty for details)

