

LUSTEN

3/4" THERMOSTATIC SHOWER SYSTEM

SET.LN.141.810

Components Included

- **VE.140** - 3/4" thermostatic valve without diverter
- **TM.LN.140** - Trim for 3/4" thermostatic valve
- **VE.DR.30** - 3/4" 3-way diverter with shut-off
- **TM.LN.30** - Trim for 3-way diverter
- **SH.04.0812.CC** - 8" x 12" rectangular stainless steel shower head
- **WA.02.16** - 16" wall mount shower arm with 1/2" female NPT connection
- **BH.05.03** - 31" sliding shower bar with hose and 4 function hand shower (HS.04.03.CC)
- **EC.02.01** - Round brass elbow connector with 1/2" female NPT connection
- **EJ.02.01** - Round exposed body jet with 1/2" female NPT connection (x4)

Available Finishes

- Chrome (CC)
- Glossy White / Chrome (CW)

(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Valve & cartridge - Limited lifetime warranty
- Components - Limited lifetime warranty (see full warranty for details)



3/4" THERMOSTATIC VALVE

VE.140

Description

- Valve with thermostatic cartridge
- 3/4" female NPT connections
- 1/2" male NPT adaptors included
- Volume control or diverter with shut-off is required

Flow Rate

- 7.2 gpm / 27.4 lpm / 60 psi

Cartridge




- CE.1401.TT cartridge

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Limited lifetime warranty
(see full warranty for more details)

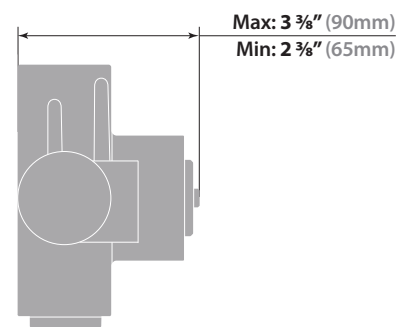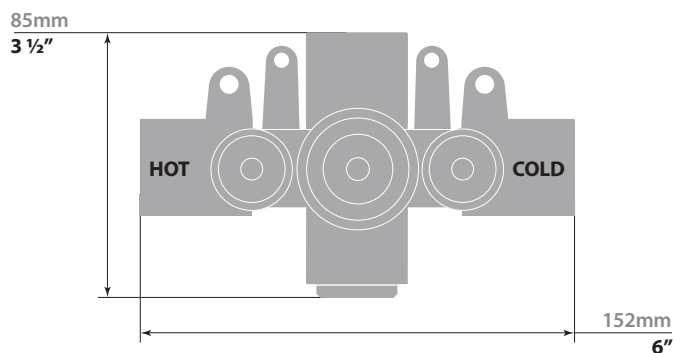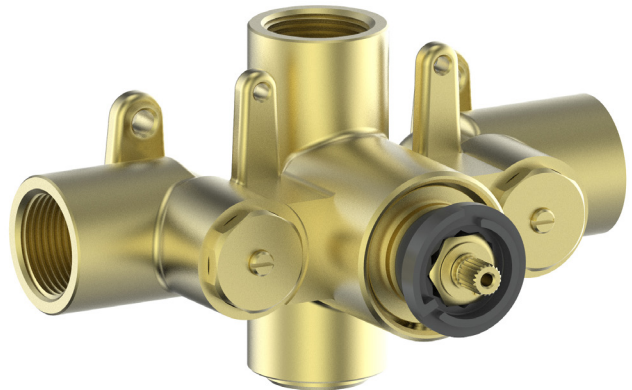

LUSTEN

¾" THERMOSTATIC VALVE & TRIM WITHOUT DIVERTER

VT.LN.140

Description

- **VE.140** - ¾" valve with thermostatic cartridge
- **TM.LN.140** - Trim for ¾" thermostatic valve
- Volume control or diverter with shut-off is required

Flow Rate

- 7.2 gpm / 27.4 lpm / 60 psi

Cartridge

- CE.1401.TT - cartridge

Available Finishes

- Chrome (CC)
- Glossy White / Chrome (CW)


(Model Pictured: Chrome)

Codes / Standards



- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Limited lifetime warranty
(see full warranty for details)



VE.140 - ¾" Thermostatic Valve

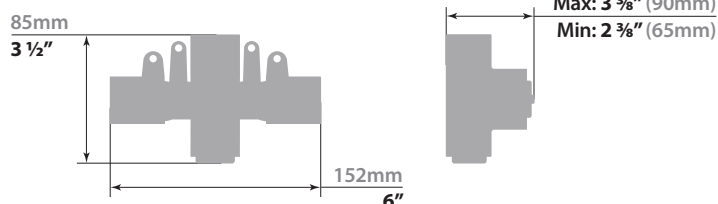

LUSTEN

3/4" 3-WAY DIVERTER WITH SHUT-OFF & TRIM

DR.LN.30

Description

- **VE.DR.30** - 3/4" 3-way diverter with cartridge
- **TM.LN.30** - Trim for 3-way diverter
- 5 positions

Cartridge

- CE.1408.DR - diverter

Available Finishes

- Chrome (CC)
- Chrome / Glossy White (CW)


(Model Pictured: Chrome)

Codes / Standards




- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Limited lifetime warranty
(see full warranty for details)

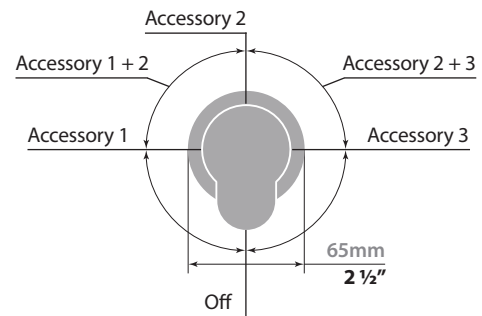

VE.DR.30 - 3/4" 3-Way Diverter with Shut-Off

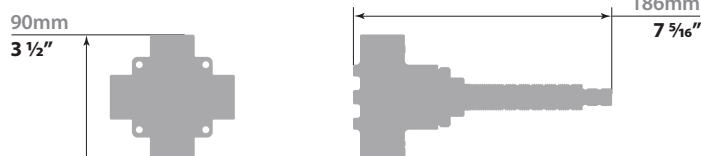

3/4" 3-WAY DIVERTER

VE.DR.30

Description

- 3-way diverter with cartridge
- 3/4" female NPT connections
- 1/2" male NPT adaptors included
- 5 positions

Cartridge






- CE.1408.DR - diverter

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Limited lifetime warranty
(see full warranty for more details)

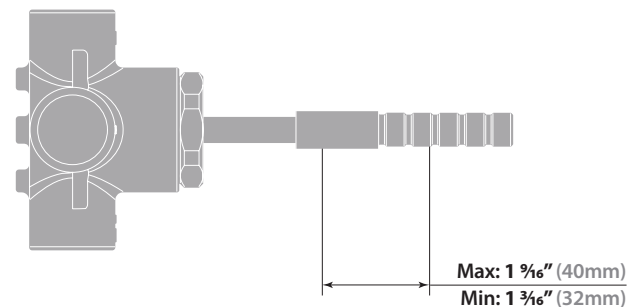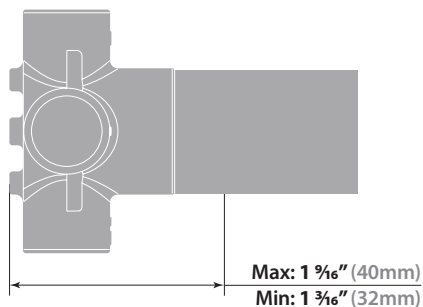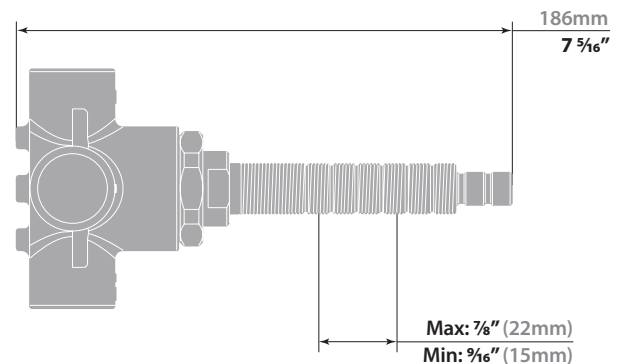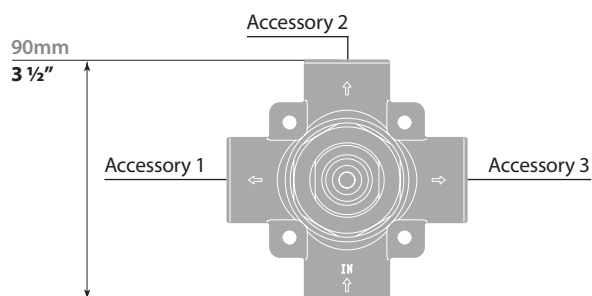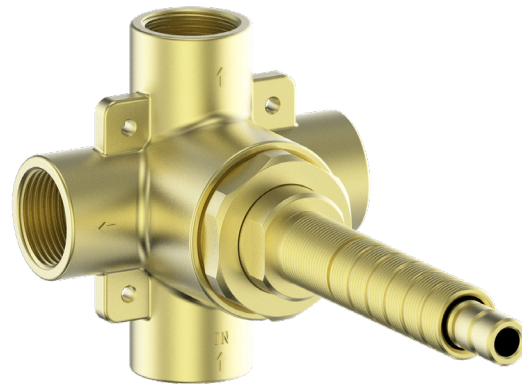

16" WALL ARM

WA.02.16

Description

- 16" wall mount shower arm with ½" female NPT connection
- Round pipe with round escutcheon plate

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Glossy White / Chrome (CW)
- Matte Black (MB)




(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

Warranty

- Limited lifetime warranty (see full warranty for details)

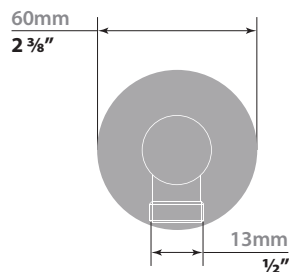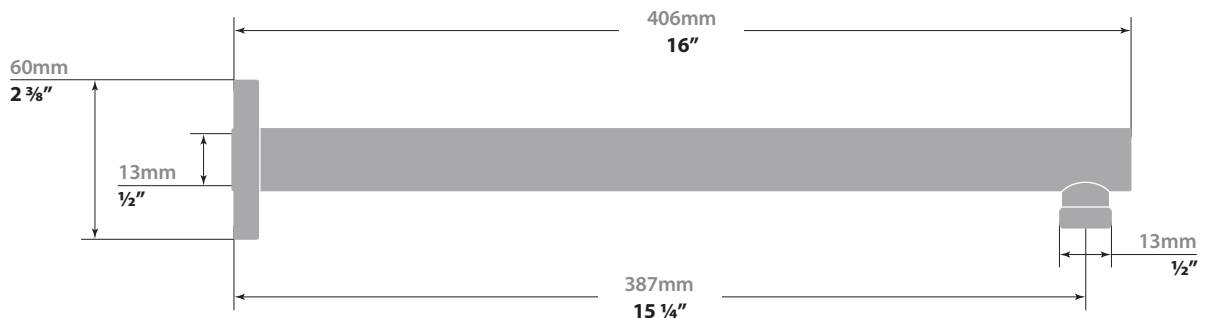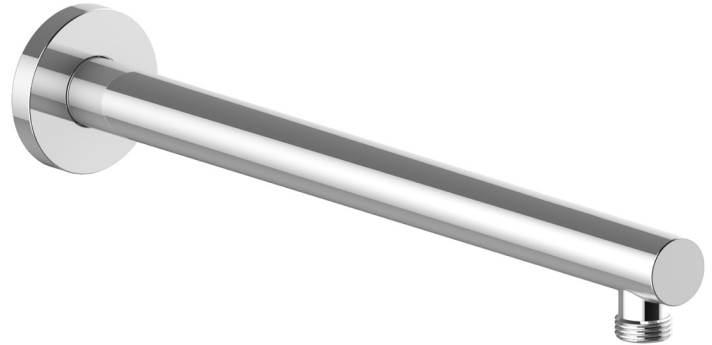

8" x 12" RECTANGULAR SHOWER HEAD

SH.04.0812.CC

Description

- 8" x 12" rectangular stainless steel shower head
- Anti-limescale technology

Flow Rate

- 2 gpm | 7.6 lpm | 60 psi

Available Finishes




- Chrome (CC)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

Warranty

- Limited lifetime warranty (see full warranty for details)

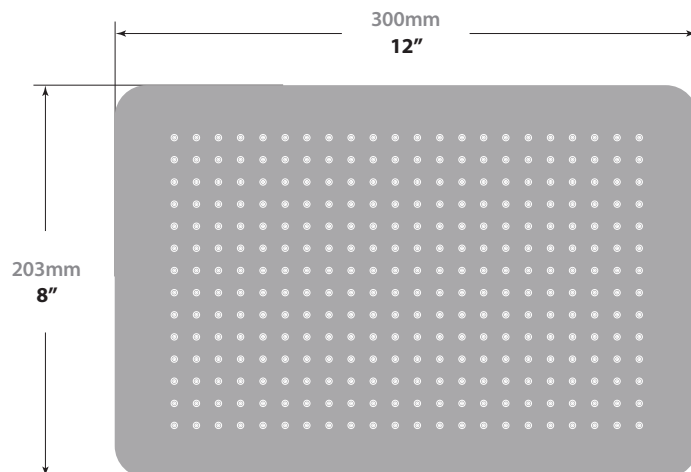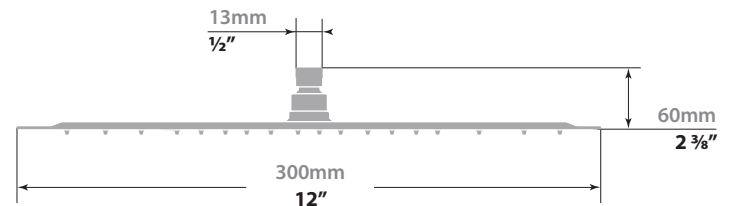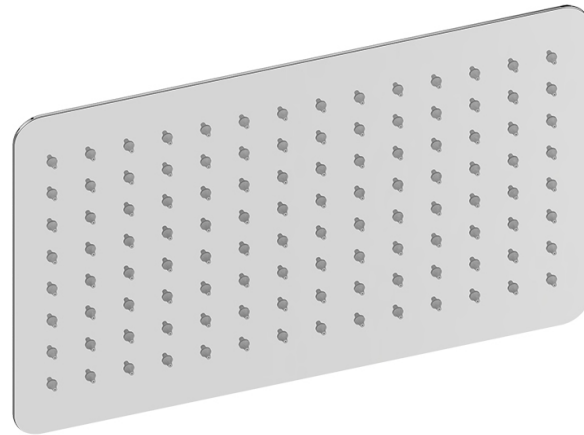

LUSTEN

SLIDING SHOWER BAR WITH HANDSHOWER

BH.05.03

Description

- **SB.05.31** - 31" sliding shower bar
- **HE.150** - 59" hose
- **HS.04.03** - 4-function hand shower

Flow Rate

- 2 gpm | 7.6 lpm | 60 psi

Available Finishes

- Chrome (CC)
- Chrome / Glossy White (CW)


(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Limited lifetime warranty
(see full warranty for details)

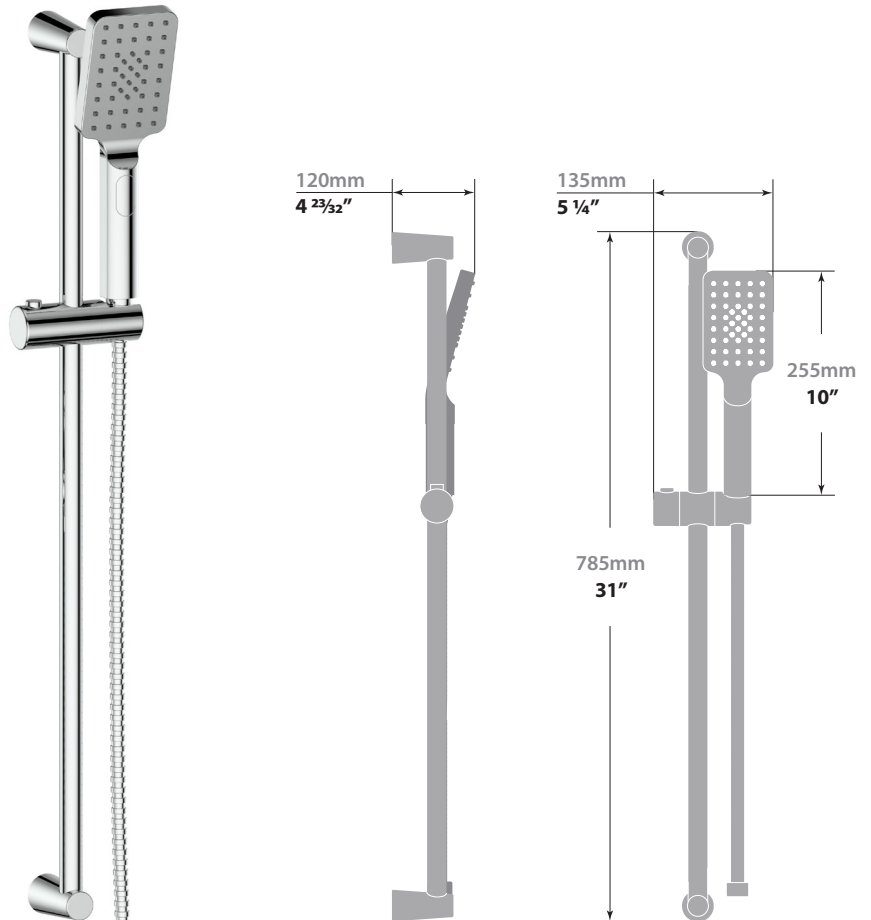

ROUND WALL SUPPLY ELBOW

EC.02.01

Description

- Round brass elbow connector with ½" female NPT connection

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Glossy White / Chrome (CW)
- Matte Black (MB)



(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

Warranty

- Limited lifetime warranty (see full warranty for details)



ROUND EXPOSED JET

EJ.02.01

Description

- Exposed body jet with ½" female NPT connection

Flow Rate

- 1.9 gpm / 7.4 lpm / 60 psi

Available Finishes

- Chrome (CC)
- Matte Black (MB)
- Brushed Nickel (BN)
- Polished Nickel (PN)
- Matte Gold (MG)

(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1

Warranty

- Limited lifetime warranty
(see full warranty for details)

