

KAPFENBERG 3/4" THERMOSTATIC SHOWER SYSTEM

SET.KG.142.930

Components Included

- VE.140 ¾" thermostatic valve without diverter
- TM.KG.140 Trim for ¾" thermostatic valve
- VE.SV.01 ³/₄" volume control (x2)
- TM.KG.01 Trim for ³/₄" volume control (x2)
- SH.01.1212 12" square stainless steel shower head
- WA.01.16 16" wall mount shower arm with ½" female NPT connection
- BH.01.03 31¹/₂" sliding shower bar with hose and 4 function hand shower (HS.04.03)
- EC.01.02 Square brass elbow connector with integral shut-off and ½" female NPT connection
- BJ.01.01 Built-in body jet with ½" female NPT connection (x4)

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)
- Brushed Gold (BG)

(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Valve & cartridge Limited lifetime warranty
- Components Limited lifetime warranty (see full warranty for details)

Please note that this shower kit is also available with a 4" ceiling arm (CA.03.04) & 8" ceiling arm (CA.03.08)

4" ceiling arm Configuration - **SET.KG.142.934** 8" ceiling arm Configuration - **SET.KG.142.938**





KAPFENBERG 3/4" THERMOSTATIC VALVE & TRIM WITHOUT DIVERTER

VT.KG.140

Description

- VE.140 ¾" valve with thermostatic cartridge
- TM.KG.140 Trim for ¾" thermostatic valve
- Volume control or diverter with shut-off is required

Flow Rate

■ 7.2 gpm / 27.4 lpm / 60 psi

Cartridge

CE.1401.TT - cartridge

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)
- Brushed Gold (BG)

(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016


Warranty


 Limited lifetime warranty (see full warranty for details)

VE.140 - $\frac{3}{4}$ " Thermostatic Valve

Vogt Industries reserves the right to change the product material and specifictions without notice. Actual product may differ from pictures. For further enquiries or assistance please contact service@vogtindustries.com.









3/4" THERMOSTATIC VALVE

VE.140

Description

- Valve with thermostatic cartridge
- ¾" female NPT connections
- ½" male NPT adaptors included
- Volume control or diverter with shut-off is required

Flow Rate

7.2 gpm / 27.4 lpm / 60 psi

Cartridge


CE.1401.TT cartridge


Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty









KAPFENBERG 3/4" VOLUME CONTROL & TRIM

SV.KG.01

Description

- VE.SV.01 ¾" volume control with cartridge
- TM.KG.01 Trim for ³/₄" volume control

Cartridge

CE.1700.R - cartridge

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)
- Brushed Gold (BG)

(Model Pictured: Chrome)


Codes / Standards


- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty


 Limited lifetime warranty (see full warranty for details)







VE.SV.01 - 3/4" Volume Control

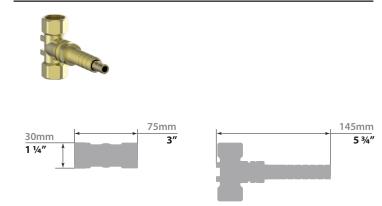

Vogt Industries reserves the right to change the product material and specifictions without notice. Actual product may differ from pictures. For further enquiries or assistance please contact service@vogtindustries.com.



3/4" VOLUME CONTROL

VE.SV.01

Description

- Volume control with cartridge
- ³⁄₄" female NPT connections
- ½" male NPT adaptors included

Cartridge


CE.1700.R - cartridge


Codes / Standards


- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty







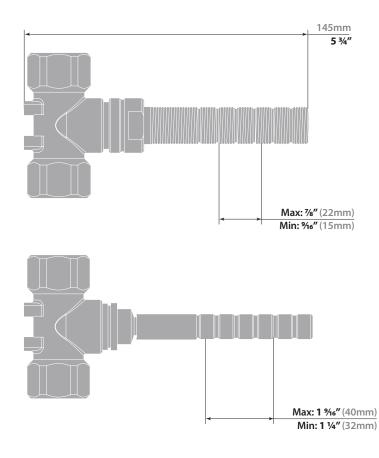



16" WALL ARM

WA.01.16

Description

- 16" wall mount shower arm with ½" female NPT connection
- Square pipe with rectangular escutcheon plate

Available Finishes


- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)
- Brushed Gold (BG)
- (Model Pictured: Chrome)


Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1


Warranty

 Limited lifetime warranty (see full warranty for details)

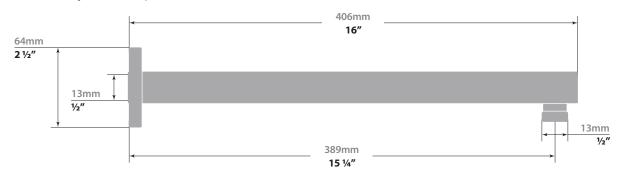



Vogt Industries reserves the right to change the product material and specificitions without notice. Actual product may differ from pictures. For further enquiries or assistance please contact service@vogtindustries.com.

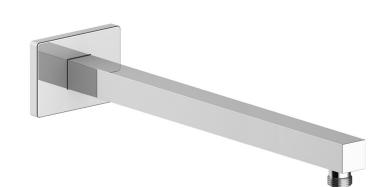



12" SQUARE SHOWER HEAD

SH.01.1212

Description

- 12" square stainless steel shower head
- Anti-limescale technology

Flow Rate

■ 2.2 gpm | 8.3 lpm | 60 psi

Available Finishes


- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)
- Brushed Gold (BG)


(Model Pictured: Chrome)


Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1

Warranty









KAPFENBERG SLIDING SHOWER BAR WITH HANDSHOWER

BH.01.03

Description

- SB.01.31 31 ½" sliding shower bar
- HE.150 59" hose
- HS.04.03 4-function hand shower

Flow Rate

■ 2 gpm | 7.6 lpm | 60 psi


Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)
- Brushed Gold (BG)
 (Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

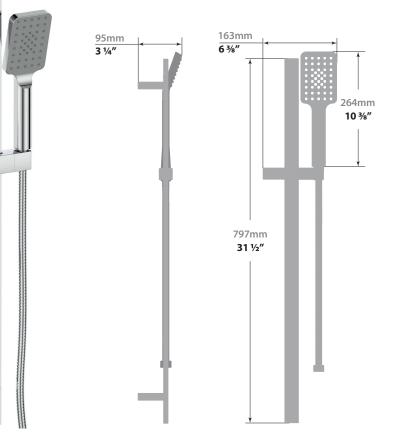

vogt SPEC SHEET

SQUARE WALL SUPPLY ELBOW WITH INTEGRAL SHUT-OFF

EC.01.02

Description

 Square brass elbow connector with integral shut-off and ½" female NPT connection

Available Finishes


- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)
- Brushed Gold (BG)


(Model Pictured: Chrome)


Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1

Warranty









SQUARE IN-WALL JET

BJ.01.01

Description

Built-in body jet with ½" female NPT connection

Flow Rate

■ 2.6 gpm | 10 lpm | 60 psi

Available Finishes

- Chrome (CC)
- Brushed Nickel (BN)
- Matte Black (MB)
- Brushed Gold (BG)

(Model Pictured: Chrome)

Codes / Standards

- Uniform Plumbing Code (UPC[®])
- ASME A112.18.1/CSA B125.1

Warranty

