

ANTAU

3-WAY THERMOSTATIC VALVE & TRIM

VT.AU.320.CC

Description

- VE.320 - 1/2" thermostatic valve with 3-way diverter
- TM.AU.320.CC - Trim for 3-way thermostatic valve
- 5 positions

Flow Rate

- 6.2 gpm | 23.4 lpm | 60 psi

Cartridge

- CE.1401.TT - cartridge
- CE.1408.DR - diverter

Available Finishes


- Chrome (CC)

Codes / Standards

- Uniform Plumbing Code (UPC®)
- ASME A112.18.1/CSA B125.1
- ASSE 1016

Warranty

- Limited lifetime warranty (see full warranty for details)

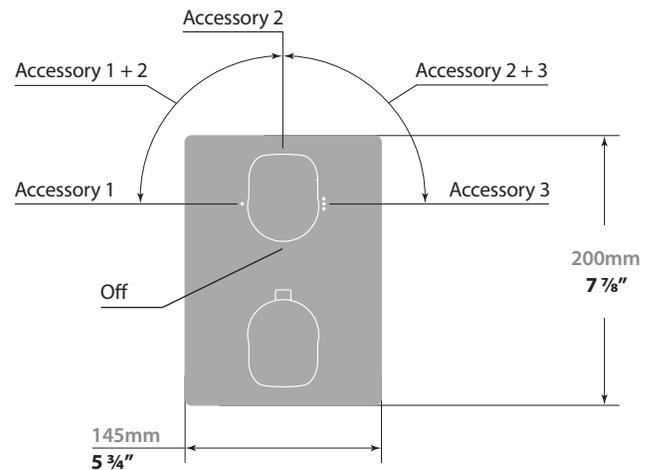

VE.320 - 3-Way Thermostatic Valve

